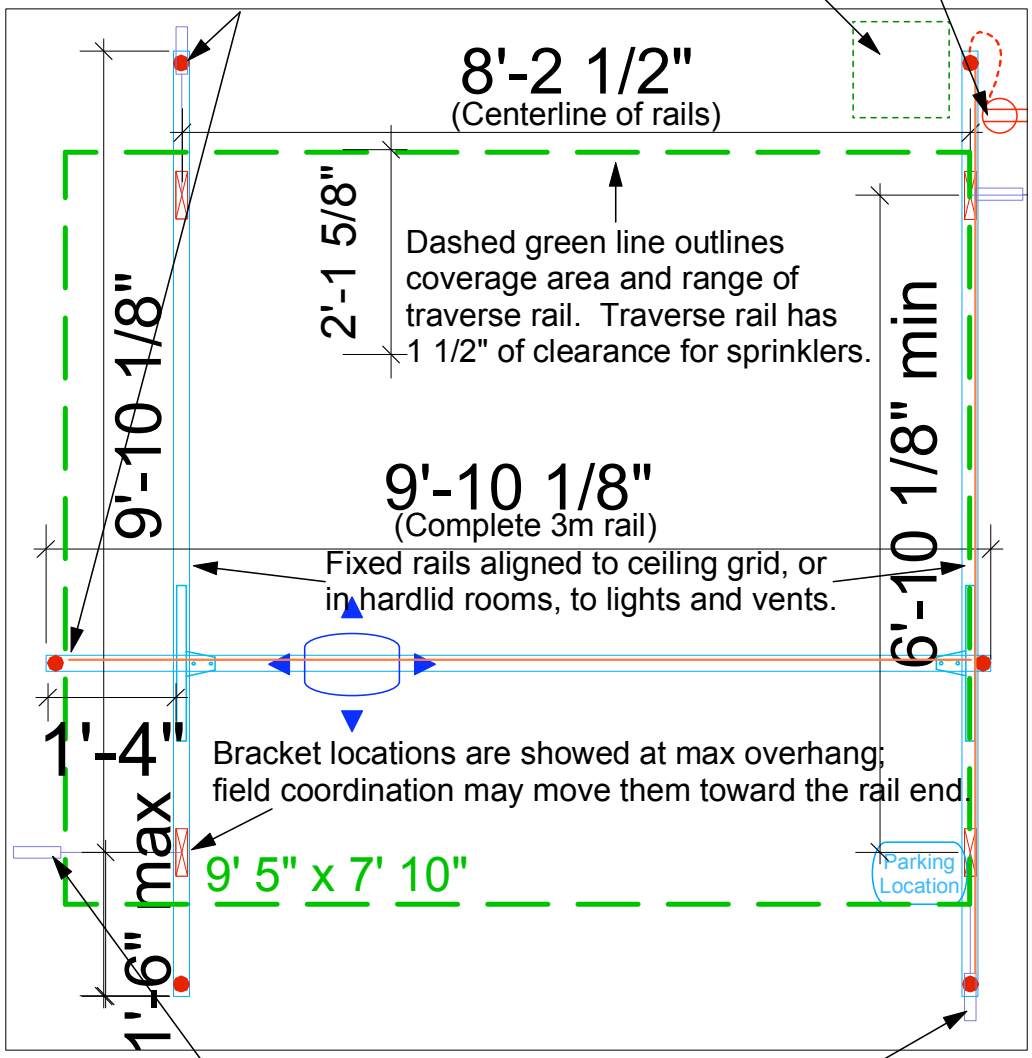

List of Materials

Qty	Item Number	Description
4	AM12425	Extended Bracket w/ Kicker
3	12223	Midi Rail, 3 m
2	12354	Trolley, Standard
6	12330	End Stop
1	120001-2023	GH2HD (AC) w/ Hanger Bar
1	12384	Charging Kit, Midi Rail
4	124425	End Cover, Midi Rail
6	12277	Midi Charging Liner

Issues:
- Rails are recessed in all rooms, including hardlid ceiling & negative pressure. Rails will be exposed 1 1/2" in tiled rooms, or 1 7/8" in the hardlid rooms.
Drywallers will need to determine seal around rail, allowing for rail flex under load.

Approved: _____

Typical Hoist Layout	Rated Load: 272kg/600#
Alpha Modalities *Advocating Zero Manual Transfers in Healthcare* PMB 3326 10002 Aurora Ave N #36 Seattle, WA 98133-9334 800.273.5749 Fax 206.374.2476 www.alphamodalities.com	
Scale: 1/4" = 1'	Revision: August 15, 2006
Drawn By: Sam Krause	Date: July 19, 2006